




QTDC2121-6t

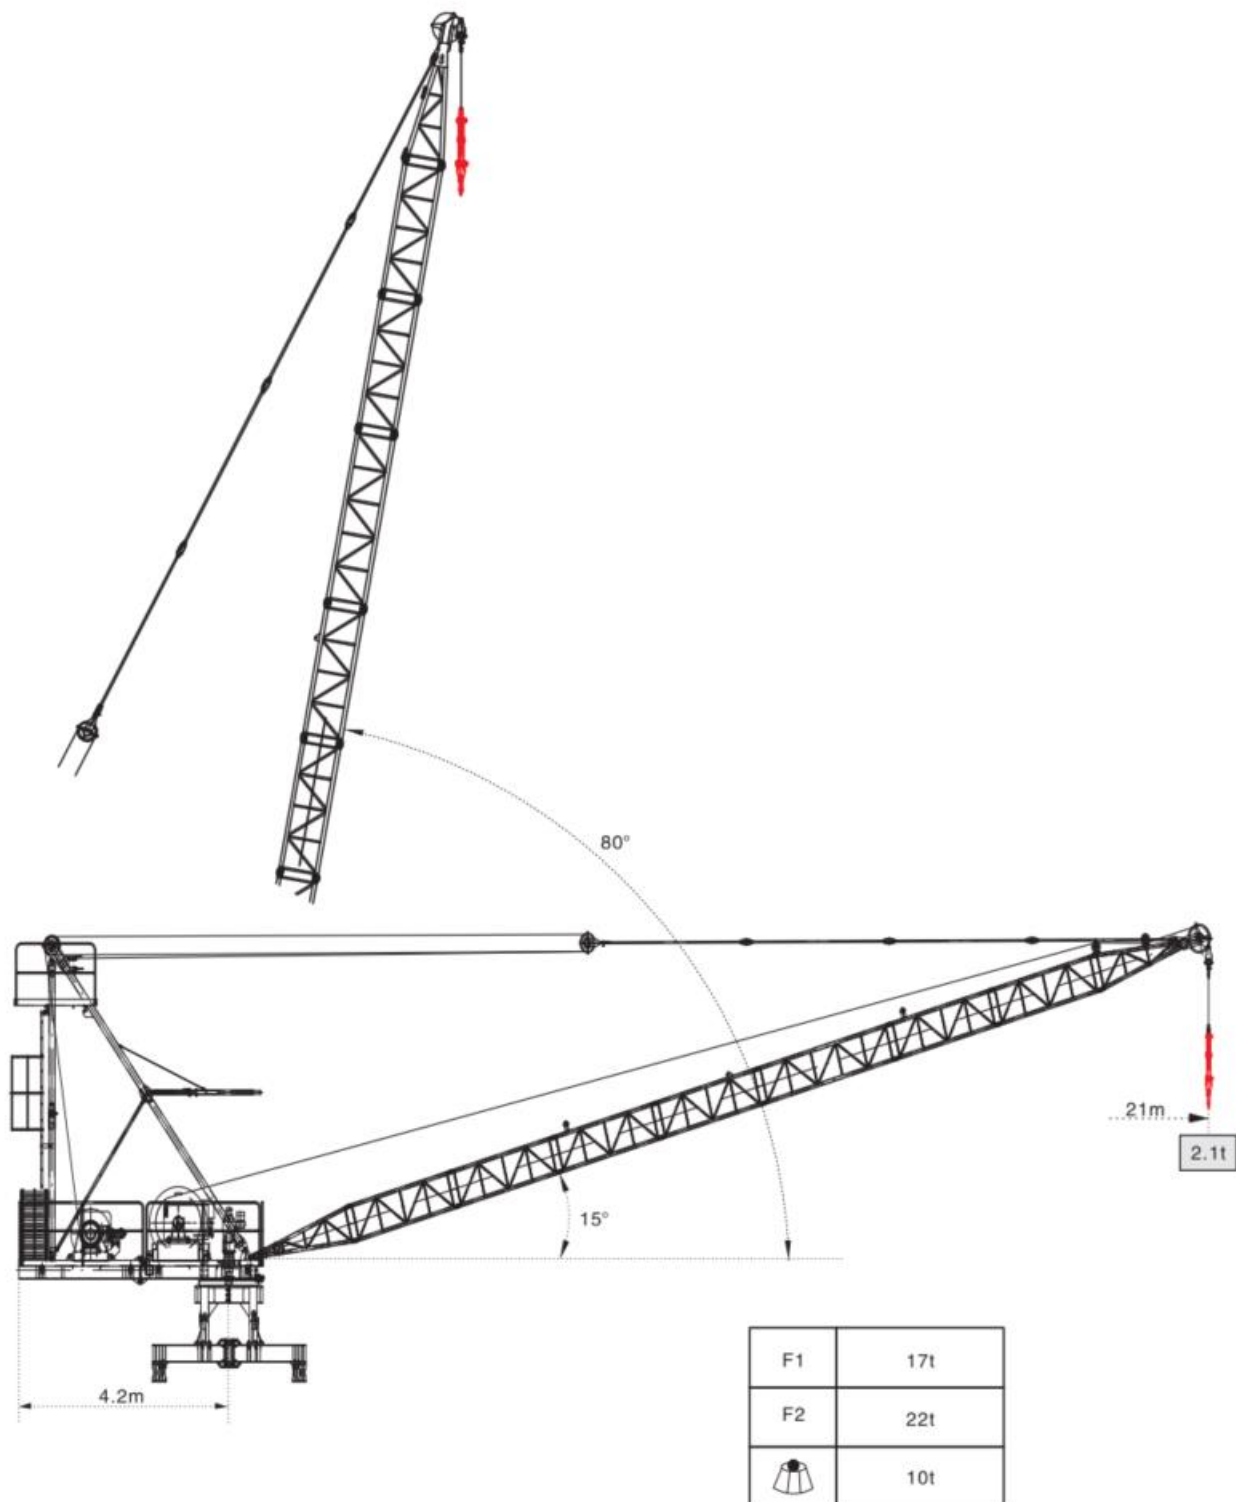

 自重 Total weight without load and counter weight

载荷特性 Load Diagrams

起重臂 Jib (m)	倍率 Fall	起重臂幅度 Range (m)	4.32~8.94	10	12	14	16	18	20	21
21	II	起重重量Load (t)	6	5.33	4.25	3.49	2.93	2.49	2.15	2
	I		3				3.03	2.59	2.25	2.1
起重臂 Jib (m)	倍率 Fall	起重臂幅度 Range (m)	3.33~9.03	10	12	14	16	18		
18	II	起重重量Load (t)	6	5.4	4.32	3.56	3	2.56		
	I		3					2.66		

配重配重表 Counter Weight

		280kg	 kg
20m	4.2m	24	6720
18m	4.2m	24	6720

机构特性 Mechanisms

机构特性 Mechanisms Specifications									KW
起升 Hoisting			t	3	1.5	3	6		
		30LVF30	m.min	0-30	0-60	0-15	0-30	600m Inverter Control	22
拉臂 Luffing		30DVF20	min	≤3.0		变频控制 Inverter Control		200m	22
回转 Slewing		RCV95	r/min	0-0.7					4.5
		RVF95	r/min	0-0.7		变频控制 Inverter Control			
电网/Power Supply				380V/50Hz 440V/60Hz (±5%)					
供电容量/Necessary Power				60KVA					
发电机组/Generator Sets				请向我方咨询/Consult us					

※本技术参数不受法律约束，技术信息请详见相应技术说明书。

Specifications and data is not legally binding.

For any technical information, please refer to the corresponding instructions.