




QTDC4038-16t

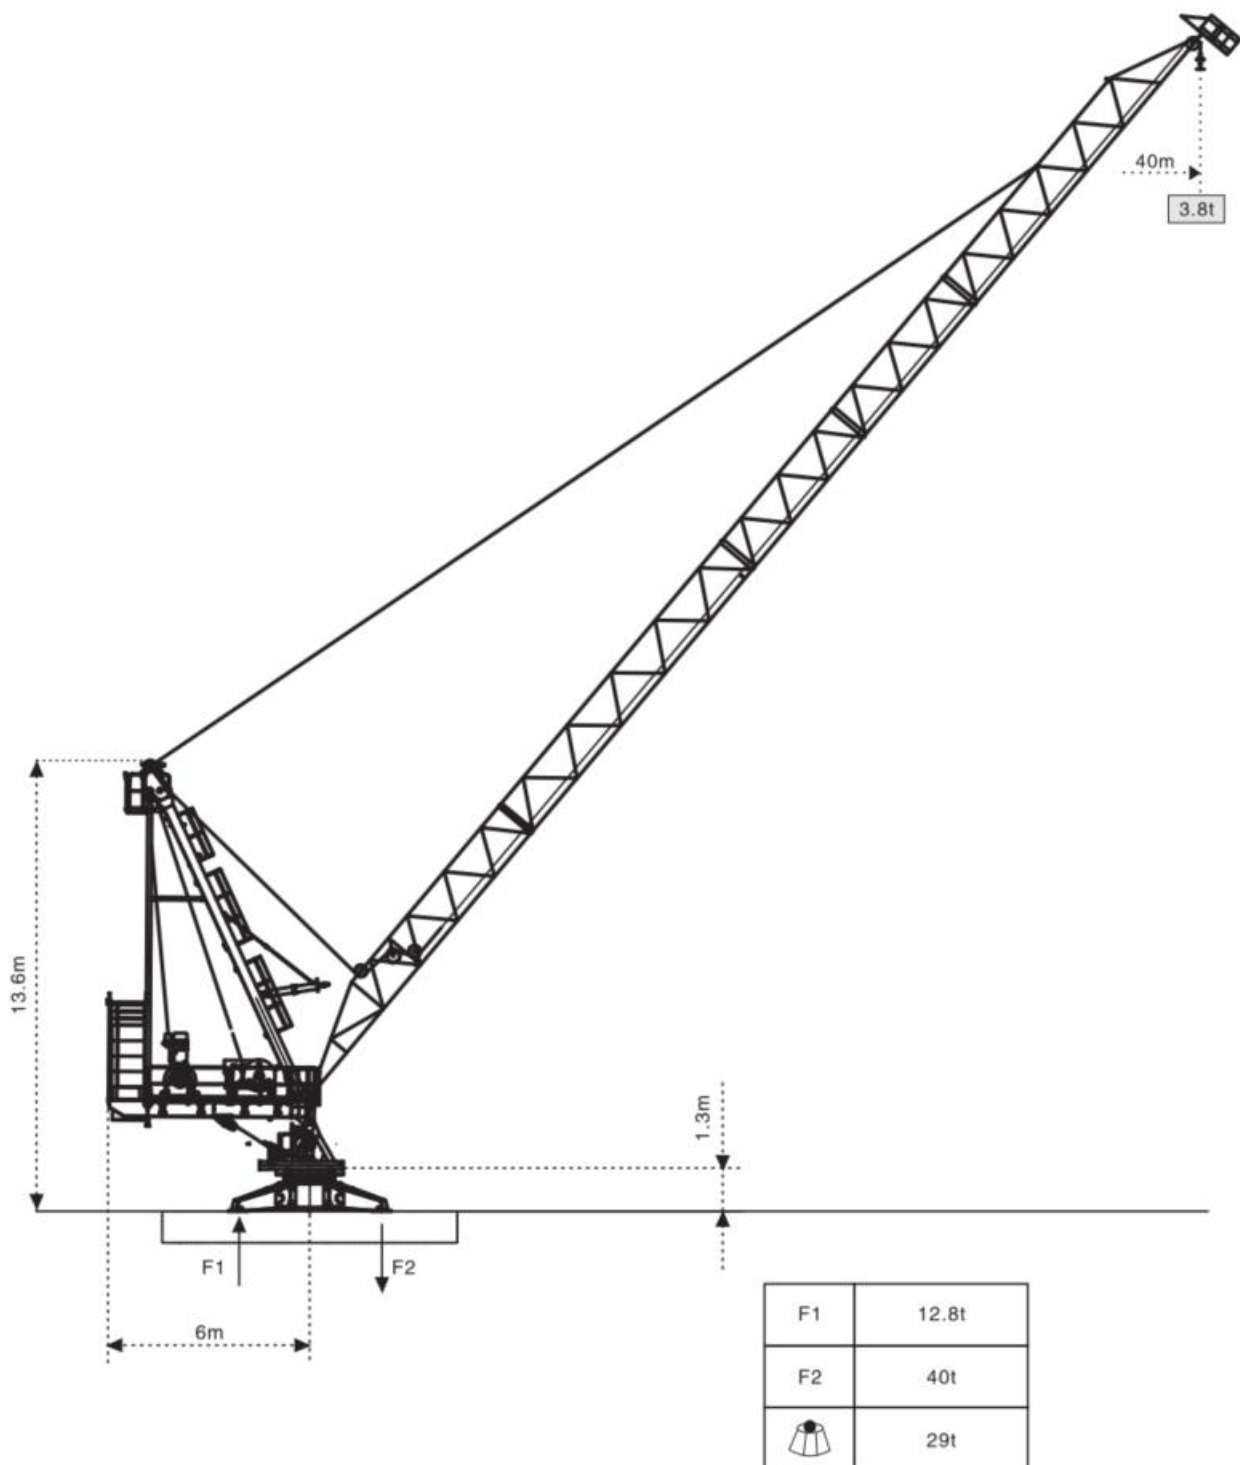

自重 Total weight without load and counter weight

载荷特性表
 Load Diagrams

起重臂 Jib (m)	倍率 Fall	起重幅度Range (m)	7.3~14.26	15	20	25	30	35	40
40	Ⅳ	起重重量Load (t)	16	15.09	10.48	7.7	5.84	4.51	3.5
	Ⅱ		8				6.14	4.81	3.8


起重臂 Jib (m)	倍率 Fall	起重幅度Range (m)	6.4~14.37	15	20	25	30	35
35	Ⅳ	起重重量Load (t)	16	15.22	10.64	7.88	6.03	4.7
	Ⅱ		8				6.33	5

起重臂 Jib (m)	倍率 Fall	起重幅度Range (m)	5.5~14.43	15	20	25	30
30	Ⅳ	起重重量Load (t)	16	15.32	10.77	8.03	6.2
	Ⅱ		8				6.5


起重臂 Jib (m)	倍率 Fall	起重幅度Range (m)	4.6~14.55	15	20	25
25	Ⅳ	起重重量Load (t)	16	15.5	10.95	8.2
	Ⅱ		8			

配重配置表
 Counter Weight


		4000kg	4000kg	1000kg	 kg
40m	6m	1	4	1	21000
35m	6m	1	4	-	20000
30m	6m	1	4	-	20000
25m	6m	1	4	-	20000

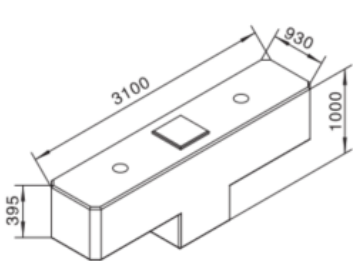

4000kg

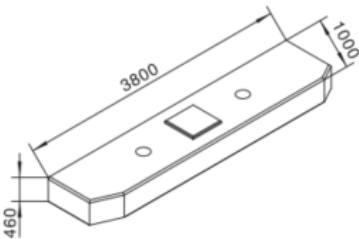

4000kg



1000kg

机构特性 Mechanisms

机构特性 Mechanisms Specifications									KW
起升 Hoisting			t	8	4	8	16		
		100LVF40	m/min	0-45	0-90	0-22.5	0-45	650m 变频控制 Inverter Control	75
		75LVF40	m/min	0-30	0-60	0-15	0-30	600m 变频控制 Inverter Control	55
拉臂 Luffing		50DVF40	min	≤3.0		变频控制 Inverter Control		200m	37
回转 Slewing		RCV120	r/min	0-0.7					2×6
		RVF120	r/min	0-0.7		变频控制 Inverter Control			2×6
电网/Power Supply				380V/50Hz 440V/60Hz (±5%)					
供电容量/Necessary Power				155KVA(100LVF40)/130VKA(75LVF40)					
发电机组/Generator Sets				请向我方咨询/Consult us					

※本技术参数不受法律约束，技术信息请详见相应技术说明书。
Specifications and data is not legally binding.
For any technical information,please refer to the corresponding instructions.