


QTDC1830-4t

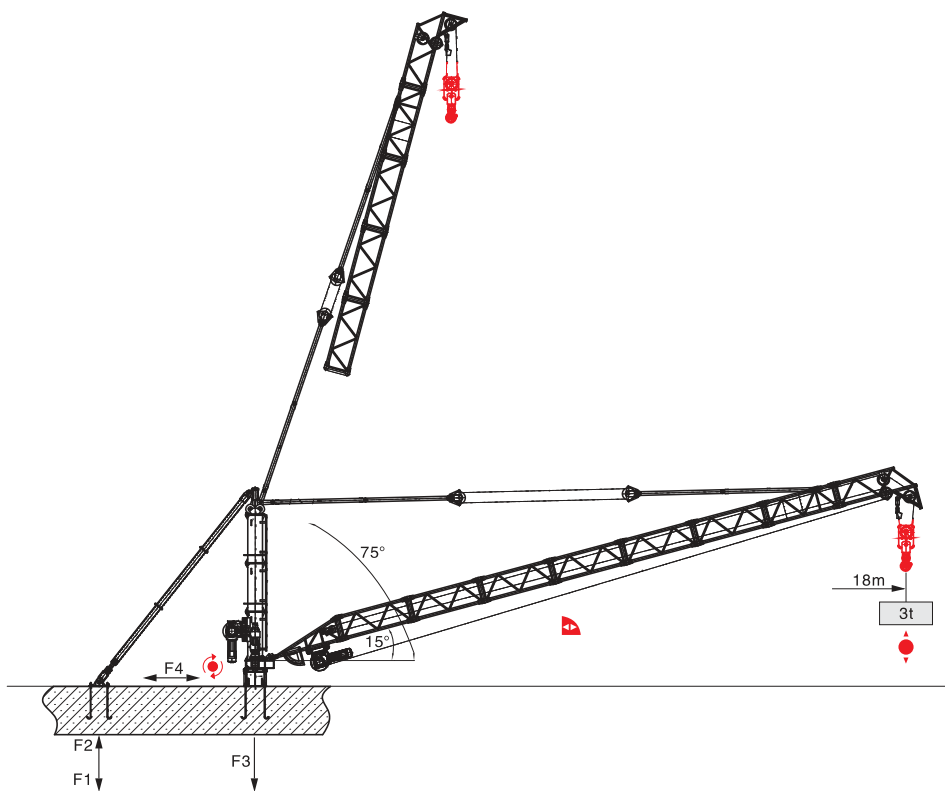

F1	20t	F3	26t
F2	20t	F4	16t
	4.5t		

 自重 Total weight without load

载荷特性表 Load Diagrams

起重臂 Jib (m)	倍率 Fall	起重 幅度	Range (m)	5.3	7.5	10	13	15	18
			Luffing Degree	75.0°	67.35°	58.17°	45.63°	35.83°	15°
18	Ⅱ	起重量Load (t)	4						3
	I		2						
起重臂 Jib (m)	倍率 Fall	起重 幅度	Range (m)	4.2	7.5	10	13	15	
			Luffing Degree	75.0°	62.07°	50.64°	33.55°	15°	
15	Ⅱ	起重量Load (t)	4						
	I		2						

机构特性 Mechanisms

机构名称 Name	机构型号 Model						功率 Power
起升 Hoisting 	10LVF20	m/min	t	m/min	t	400m 变频控制 Inverter Control	7.5Kw
		0-20	2	0-10	4		
拉臂 Luffing 	10DVF20	min	≤3.0			变频控制 Inverter Control	7.5Kw
回转 Slewing 	5RVF	r/min	0-0.7			变频控制 Inverter Control	4Kw
电网/Power Supply				380V/50Hz 440V/60Hz (± 5%)			
供电容量/Necessary Power				24KVA			

※ 本技术参数不受法律约束，技术信息请详见相应技术说明书。
Specifications and data is not legally binding.
For any technical information, please refer to the corresponding instructions.