


QTDC3023-10t

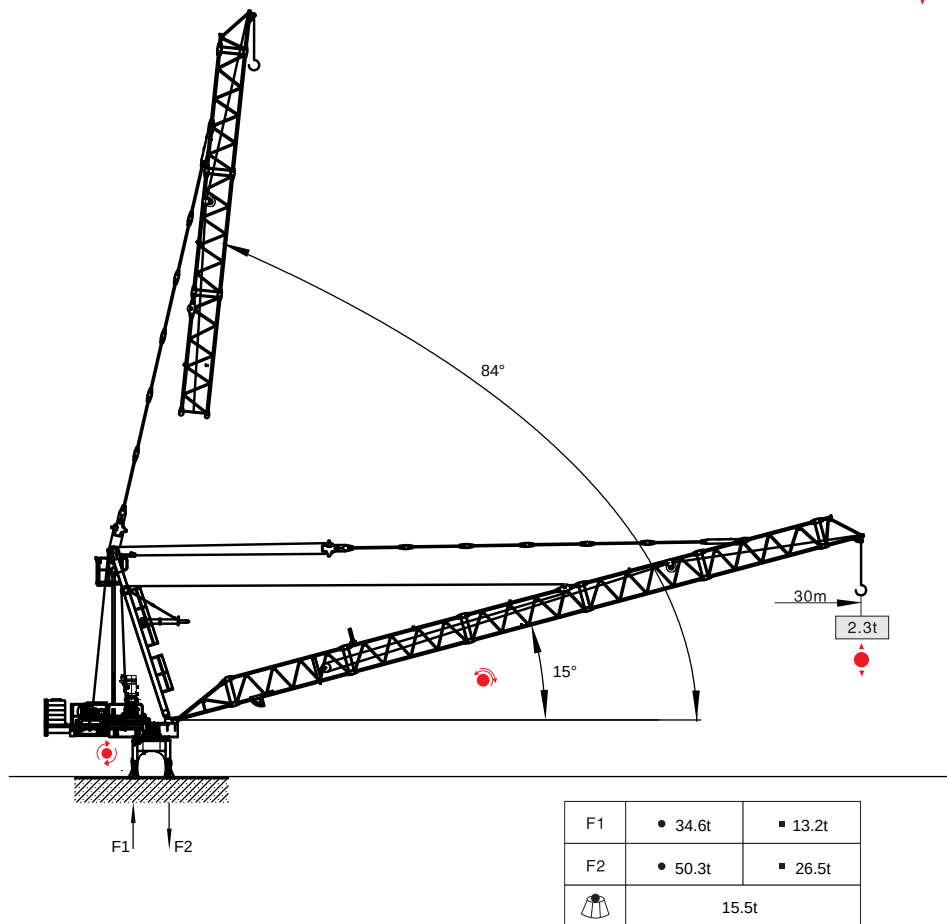

 自重 Total weight without load and counter weight

载荷特性表 Load Diagrams

带配重 With counter weight


起重臂 Jib (m)	倍率 Fall	起重臂 幅度	Range (m)	4.5~10.65	11	13.2	15	17.5	20	23	25	28	30
			Luffing Degree	84° ~69.9°	69.3°	66.1°	61.1°	55.7°	49.9°	42.2°	36.4°	25.6°	15°
30	Ⅳ	起重量Load (t)		10	9.35	7.35	6.26	4.7	4.13	3.3	2.85	2.31	2
	Ⅲ			7.5			6.42	4.85	4.28	3.45	3	2.46	2.15
	Ⅱ			5					4.43	3.6	3.15	2.61	2.3
起重臂 Jib (m)	倍率 Fall	起重臂 幅度	Range (m)	4.5~10.8	11	13.6	15	18	18.05	20	23	25	
			Luffing Degree	84° ~65.3°	64.9°	59.8°	54.6°	45.9°	45.8°	39.4°	27.3°	15°	
25	Ⅳ	起重量Load (t)		10	9.53	7.35	6.44	5.02	4.7	4.31	3.4	3.03	
	Ⅲ			7.5			6.59	5.17	4.85	4.46	3.55	3.18	
	Ⅱ			5						4.61	3.7	3.33	
起重臂 Jib (m)	倍率 Fall	起重臂 幅度	Range (m)	4.5~11	14	15	18	18.6	20				
			Luffing Degree	84° ~57.9°	49.6°	43.6°	29.6°	26.1°	15°				
20	Ⅳ	起重量Load (t)		10	7.35	6.62	5.2	4.7	4.49				
	Ⅲ			7.5		6.77	5.35	4.85	4.64				
	Ⅱ			5					4.79				

不带配重 Without counter weight

起重臂 Jib (m)	倍率 Fall	起重臂 幅度	Range (m)	4.5~10.8	11	13.2	15	18.4	20	23	25	28	30
			Luffing Degree	84°~70°	69.3°	66.1°	61.1°	54.5°	49.9°	42.2°	36.4°	25.6°	15°
30	Ⅳ	起重量Load (t)		8	7.67	5.9	5.12	3.8	3.36	2.67	2.3	1.85	1.6
	Ⅲ			6			5.22	3.9	3.46	2.77	2.4	1.95	1.7
	Ⅱ			4					3.56	2.87	2.5	2.05	1.8
起重臂 Jib (m)	倍率 Fall	起重臂 幅度	Range (m)	4.5~10.8	11	13.5	15	18	19.1	20	23	25	
			Luffing Degree	84° ~65.3°	64.9°	59.8°	54.6°	45.9°	42°	39.4°	27.3°	15°	
25	Ⅳ	起重量Load (t)		8	7.88	5.9	5.32	4.14	3.8	3.56	2.87	2.5	
	Ⅲ			6			5.42	4.24	3.9	3.66	2.97	2.6	
	Ⅱ			4						3.76	3.07	2.7	
起重臂 Jib (m)	倍率 Fall	起重臂 幅度	Range (m)	4.5~11.2	12	13.8	15	18	20				
			Luffing Degree	84°~57.7°	54.6°	49.5°	43.6°	29.6°	15°				
20	Ⅳ	起重量Load (t)		8	7.35	5.9	5.58	4.39	3.8				
	Ⅲ			6			5.68	4.49	3.9				
	Ⅱ			4									

配重配置表 Counter Weight

		1500kg	 kg
30m	4.5m	5	7500
25m	4.5m	5	7500
20m	4.5m	5	7500

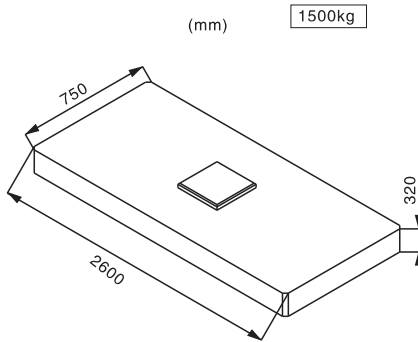

机构特性 Mechanisms

机构名称 Name	机构型号 Model						功率 Power
起升 Hoisting 	60LVF25	m/min	t	m/min	t	600m 变频控制 Inverter Control	45Kw
		0-45	5	0-22.5	10		
		0-90	2.5	0-45	5		
拉臂 Luffing 	33DVF30	min	≤3.0			变频控制 Inverter Control	24Kw
回转 Slewing 	RCV185	r/min	0-0.7				9Kw
	RVF185	r/min	0-0.7			变频控制 Inverter Control	9Kw
电网/Power Supply				380V/50Hz 440V/60Hz (±5%)			
供电容量/Necessary Power				98KVA			

※本技术参数不受法律约束，技术信息请详见相应技术说明书。

Specifications and data is not legally binding.

For any technical information, please refer to the corresponding instructions.